

# Technical Data Sheet

3304 Black Acrylic Foam Tape

3304 Gray Acrylic Foam Tape

3304 White Acrylic Foam Tape

## Product Description

---

CCL Olympic 3304 is a 400 micron thick, soft acrylic foam tape for demanding applications. The tape features a soft and high-tack multi-purpose acrylic adhesive, delivering exceptional bonding capabilities across an extensive range of surfaces, both smooth and rough. The tape is further characterized by a 100% through-and-through coloring that is amongst others, uniquely available in black. This feature contributes to a professional aesthetic in application where appearance matters.

In many applications, CCL Olympic 3304 can be used to replace mechanical fasteners such as rivets, screws, welds or liquid adhesives.


## Product Features

---

- High performance double sided pressure sensitive adhesive tape
- Unique visco-elastic nature ensures a strong bond which can absorb shocks and stress
- 0.4 mm thick
- Available in black (B), gray (G) or white (W).
- 100% through-and-through coloring
- Long-lasting bond for indoor and outdoor applications
- The adhesives have an excellent solvent, plasticizer, and moisture resistance.
- Slitted on request
- 100% closed cell structure

## Product Construction

---

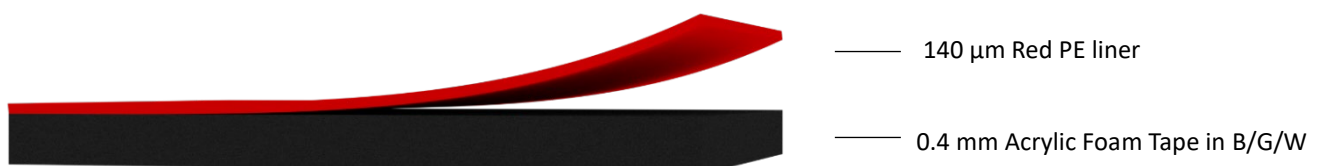

Technical Information Note: The technical data below cannot be used for specification purposes but should be considered representative or typical only.

#### Available sizes

Property	Value	Additional information
Standard roll length	66 m.	Other lengths available
Effective roll width	900 mm.	
Core size	3 inch.	HIPS oversized

#### Typical Product Properties & Test Conditions

Property	Value	Method	Additional information
Total tape thickness	0.4 mm.	ASTM D3652	
Thickness tolerance	15%		
Density	0.78 g/cm <sup>3</sup>	Internal method	
Adhesive type	Soft Acrylic		
Color	Black, Gray or White		
Liner type	PE		
Liner thickness	140 μm		
Color liner	Red		

## Typical Performance Characteristics

Property	Value	Method	Additional information
90° peel adhesion, initial	18 N/cm	ASTM D3330	Stainless Steel 20 min. dwell time
90° peel adhesion, final	22 N/cm	ASTM D3330	Stainless Steel 72 hrs. dwell time
90° peel adhesion, final	15 N/cm	ASTM D3330	PMMA 72 hrs. dwell time
Static shear (20°C)	1500 G	ASTM D3654	
Static shear (90°C)	500 G	ASTM D3654	
Dynamic shear	895 kPa	ASTM D1002	Shear rate: 12.7 mm/min
Minimum long term temperature	- 40 °C	Internal Method	
Maximum long term temperature	150 °C	Internal Method	
Maximum short term temperature	200 °C	Internal Method	

## Additional information test method

- 90° peel adhesion according to ASTM D3330. Stainless steel substrate, aluminum backing. 72-hour dwell time at room temperature. Listed value is average value force to remove adhesive at room temperature.
- Static shear according to ASTM D3654. Stainless steel substrates, 0.5 sq.in. (3.23 sq.cm.), 24-hour dwell time at room temperature. The adhesive will hold its listed weight for 10,000 minutes (approximately seven days) at the listed temperature.
- Long term maximum temperature is the temperature at which the adhesive will hold 250 grams under static load (10,000 minutes).
- Short term maximum temperature is the temperature to which the adhesive can be exposed for four hours with a static load of 100 grams.

## Product Applications

---

3304 is suitable for a range of applications including:


- Automotive wheel trims, mirrors and tread plates
- Outdoor signage and window grilles
- White goods
- Mobile electronics
- Component mounting

## Product code structure

---

The structure of our product code is as follows:

For example 3304B:

 A diagram showing the breakdown of the product code '3304B 900mm x 66m'. It consists of a series of nested L-shaped lines. The outermost line is the longest, representing the full code. Each subsequent line is shorter, representing a portion of the code. Lines are drawn from the '33' part, the '04' part, the 'B' part, the '900mm' part, and the '66m' part, with corresponding labels to the right. <b>3304B 900mm x 66m</b>	33	= series number.
	04	= product thickness in mm.
	B	= Black
	900 mm.	= standard product width
	66 m.	= length of product

## Custom Solutions

---

We can modify all our adhesive and mechanical properties for various solutions, such as peel, adhesion, shear, softness, impact resistance, tack, color, rigidity, flexibility, temperature resistance and even smell to create the solution that meets your exact specifications.

## Additional Product Information

---

Product Application	The application surface should be clean and dry. In order to optimize performance, surface temperatures should be around room temperature.
Storage Conditions & Shelf Life	3304 Olympic tapes must be stored between 10°C to 30°C, and 0-95% relative humidity. The optimum storage conditions are 22°C and 50% relative humidity and in original sealed packaging. If stored under recommended conditions, then this material will retain its specified performance criteria for 2 years. Performance of tapes is not projected to change even after shelf life expires, but it is recommended that the tapes be used within two years.
Conflict Minerals	Conflict Minerals refers to illegal mining of minerals or other derivatives (Tin, Tantalum, Tungsten and Gold) mined in the provinces of the DRC (Democratic Republic of Congo). CCL-Olympic does not use Tin, Tantalum, Tungsten or Gold, or any derivative thereof, for the production of any of their products. Official statement available on request.
RoHS	RoHS (Restriction of Hazardous Substances). Olympic hereby confirms that our products from series <b>LBL, 1000, 3000, 5000, 7000, 8000 and 9000</b> comply with EU Directive 2011/65/EU (RoHS recast/RoHS 2), as amended by EU 2015/863. Official statement available on request.
REACH	Olympic hereby confirms that in case of products from the series <b>LBL, 1000, 3000, 5000, 7000, 8000 and 9000</b> we always observe the prescriptions of REACH (1907/2006/EC) regulation and the product(s) are fully compliant with the relevant regulation. Official statement available on request.
PFAS	At CCL-Olympic, we want to reassure our customers that our products are entirely free of PFAS (Per- and Polyfluoroalkyl Substances), underscoring our commitment to product safety and environmental responsibility. Official statement available on request.
ISO	CCL Olympic is ISO9001 and ISO14001 certified.

---

Warranty & Limited Liability Important Notice To Purchaser: All statements, technical information and recommendations herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied, including the implied warranties, of merchantability and fitness for purpose: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT OR INDIRECT, INCIDENTAL, OR CONSEQUENTIAL, ARISING OUT OF THE USE OF OR THE INABILITY TO USE THE PRODUCT. No statement or recommendation not contained herein shall have any force or effect in an agreement signed by officers of seller or manufacturer.